

# USER MANUAL

*MODEL: D70-3Channels Dash Cam*

# CUSTOMER SUPPORT

- Item NOT As Describe?
- Item Damage or Defective?
- Missing Items or accessories?
- Problem with installation?
- Any issues what so ever.....

**CONTACT US BEFORE RETURNING THE ITEM**

**WE WILL HELP YOU SOLVE ANY ISSUES**

**EMAIL US:**

*help@zkcamspy.com*

*Usually response in 8hours*

Email to us directly by scanning the QR code.

**Message / Call US:**

Message or Call us directly by scanning the QR code.

## Box Contents



D70 Dash Cam



32GB TF Card

**inserted in dash cam*



Sticky Bracket



External Rear Camera



Car Charger



Installation Kit



Electrostatic film



Manual

# Dash Cam Overview


① Power Button
② UP Button
③ Down Button
④ Mode/Menu Button
⑤ OK Button
⑥ LED Light Button




⑦ Reset Hole
⑧ TF Card Slot




⑨ Power Slot(USB-C)
⑩ Rear Cam Slot(AV)
⑪ Bracket Interface



# Button Instruction

| | | |
|---|---|---|
| ① | POWER BUTTON | **Turn ON/OFF The Camera**: Long-Press Power button for 2-3s. |
| | | **Screen Saver:** Short-Press Power Button to turn OFF/ON the screen in working status. |
| ② | UP BUTTON | Short-Press once to scroll UP in Menu setting |
| | | ***Short-Press once to switch the display windows of the front camera,carbin camera and external rear camera*** |
| | | Short-Press once to scroll to previous video files in Playback Mode |
| ③ | DOWN BUTTON | Short-Press once to scroll DOWN in Menu setting |
| | | ***Short-Press once to mute Audio Recording in Video Mode*** |
| | | Short-Press once to scroll to next video files in Playback Mode |
| ④ | MENU/MODE BUTTON | **Enter the Menu Settings:** Long-Press once on Menu Button in ***NON-Recording*** Status |
| | | **Exit the Menu Setting:** Short-Press on Menu button in Menu status |
| ⑤ | OK BUTTON | Stop/Start Recording: Short-Press Press once to start/stop video recording |
| | | Short-Press once to play/pause current video in Playback Mode |
| | | Short Press once to snap a photo in Photograph Mode |
| | | Short-Press once to enter/save the setting in Menu Setting |
| ⑥ | LED LIGHT BUTTON | Turn on of the cabin camera's led lights |
| ⑦ | RESET HOLE | Reset the Dash Cam |

# Install Front Camera

***Step 1.*** Install electrosatic film.



**IMPORTANT NOTES**

***It's very importance to clean it.***
***If the glass it dirty, the bracket will be easily to drop***


Windowshield
Clean the Windshield Glass by the clean accessories in the box





**Please peal off the cover marked *"①"in Red*, then install on the glass**



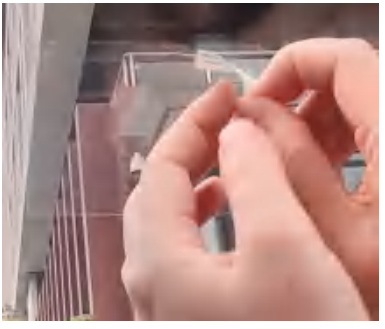

After Install the film on the cleaned Windshield glass, then peal off the other cover marked ***"②"in green***.

***Step 2.*** Install the brakcet.
Remove the film on the bracket cover.
Then put it on the electrosatic film.





**IMPORTANT NOTES**

***Please do not remove or take it off after installation.***

***Step 3.*** Connect the car charger to camera's USB port and Wire the cable according to the overall wiring diagram below

Wiring image




Wiring Method A



Wiring Method B

*Please use the original car charger provided to avoid fault or incompatibility.*

# Install the Car Charger's Cable

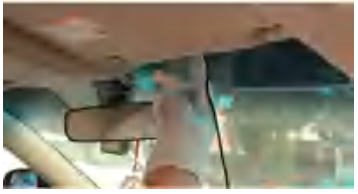


***a.***hide the cable into to the top panel as the photo




***b.***Break the side panel slightly and insert the cable,please be careful if there is a ***airbag***



***c.*** then insert the cable to the door's sealing tape.

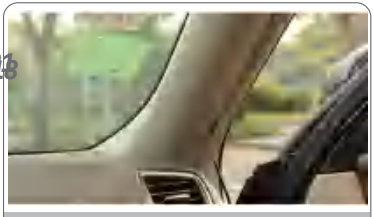

***d.*** insert the cable according to the door's sealing tape.




***e.*** insert the cable according to the door's sealing tape.



***f.***connect the car charger to Cigarette lighter

## IMPORTANT NOTES



If your vehicle has side curtain airbags please be very careful when running any cables along your vehicle windows. Ensure you are not running Cable past any of the airbags as this can prevent the airbags from deploying



Please make sure the cigarette lighter is clean for connection.

Please check the car charger's red indicator whether is on.

## Install the Rear Camera



***a.*** insert the rear cam into dashcam body completely without any metal part exposed



Wiring Method A


or



Wiring Method B

***b.*** Install the rear camera's cable according the diagram photo above.

***Install the rear camera's cable.***



***a.***hide the cable into to the top panel as the photo




***b.***Break the side panel slightly and insert the cable,please be careful if there is a ***airbag***



***c.*** then insert the cable to the door's sealing tape.



***d.***Break the panel slightly and insert the cable,please be careful if there is a ***airbag***




***e.***keep inserting the cable to the door's sealing tape.




***f.***keep inserting the cable to the door's sealing tape until close to the trunk



***g.***Move the trunk's panel.



***h.***insert the cable according to the red diagram.

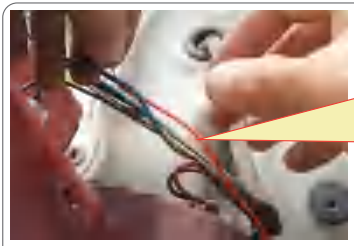

***i.***connect the rear camera's red cable to the Positive pole of the reversing light .


**IMPORTANT NOTES**

The red cable of the rear camera is connected for showing reversing image automatically when backing the car.


If the reversing image unnecessary for you, please do not connect it and skip this step.



***j.***put the 3M sticker on the rear cam's bracket, and ajust angle.



k.fix the rear cam in the middle and above the license plate frame.



***l.*** connect the rear camera to the wired cable

**IMPORTANT NOTES**

Please kindly note to align the two arrows to connect.

