


4G Dual Lens Zoom Solar Battery Camera User Manual




V515.6

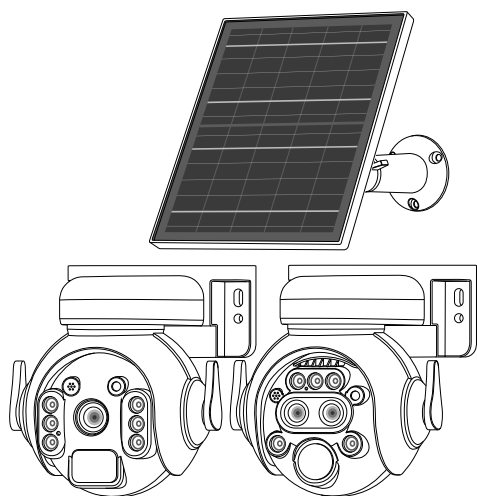

Do not throw the product into fire or short-circuit it, to prevent leakage, overheating, or explosion.

1.3. Battery Interface:

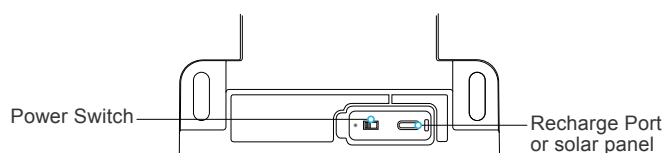


Tips: About 7 hours full charge batteries

ATTENTION :


Fully charge the battery before using the camera for the first time.

2. INSTALLATION METHOD

2.1 Wall mounting installation




2.2 Ceiling Hanging installation



1. PRODUCTS & PACKING LIST

1.1 Product Diagram:

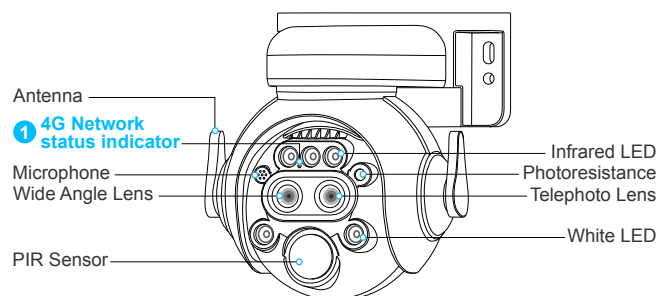

1 4G Network status indicator (Enable/Disable in APP)

Red light ON: Power on now


Red and Blue lights flash slowly and alternately: No 4G sim card was recognized

Red and blue lights flash quickly: Searching 4G network

Blue light keeps ON: 4G connection successful

If the network is not configured for more than five minutes, the camera goes to sleep status and blue indicator turns off, you need to power on again if you want to reconfigure the network.

1.2. 4G Camera Card Slot:

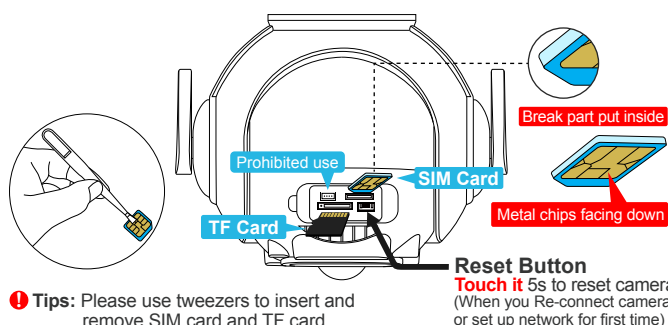

- 1 -



ATTENTION :

Remove all protective films before use

3. APP REGISTRATION

3.1. Scan the following QR code or searching for "UBox" from the App Store(for iOS devices) or Google Play Store (for Android smart phone) to download and install the app.




iOS / Android

3.2. Open the app then input your E-mail address then click "Register". Check and select to agree the agreement then your E-mail box will get an verification code.(For better user's experience, please allow to open all permissions to avoid missing any notifications from the app.)


4. 4G NETWORK CONNECTION

Note: If the device does not support Bluetooth network configuration or Bluetooth network configuration fails, please configure it as follows.

- 4.1. Click "Add Family" then set the room or position as per reminders.
- 4.2. Enter your family name and then click "Next".
- 4.3. Input the necessary information just like Country, Province, then click "Finish".

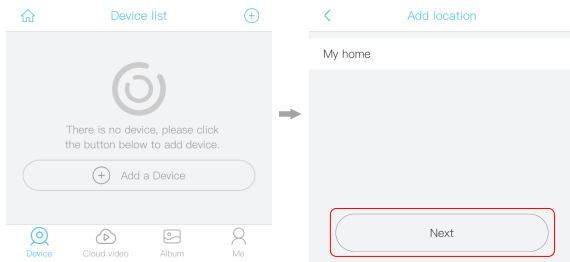


- 4.4. Insert the SIM card into device then put the battery into the device, and some of models need install antenna.
- 4.5. After power on the device, wait for about 1 minute, the device blue LED lit on all time, then connect the camera.

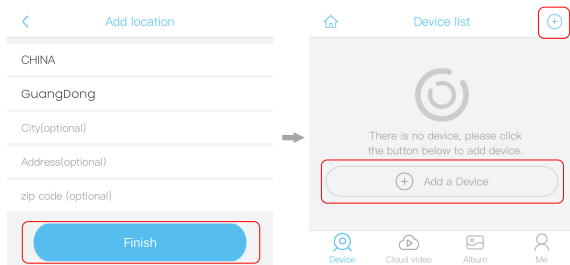


- 4 -

- 4.6. Click "Setup 4G Device" to enter the next step.

- 4.7. If the device blue LED not light up, please check below config notes.

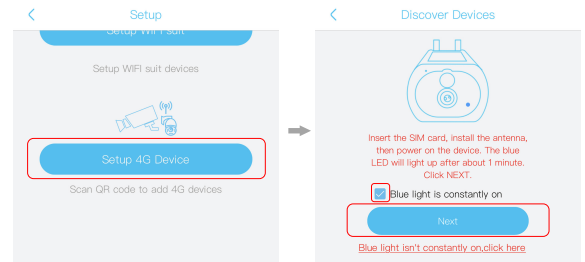


- 4.8. Find the UID QR code on device, then use APP scan the QR code.
- 4.9. APP are searching the device in internet it may take 5-60 seconds.

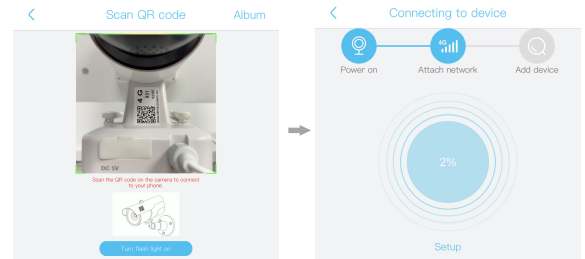

- 4.10. Select the name and device location then click "Next".

- 4.11. The connection is successful, click "OK" to complete the connection.


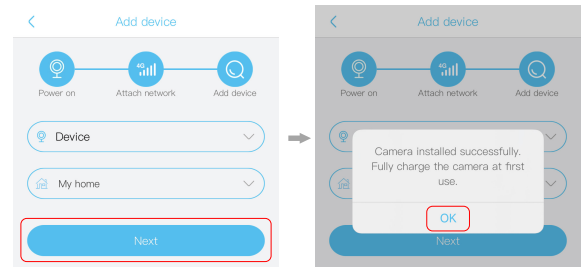


- 5 -

5. DEVICE SETTING

Notes about PIR detection

- * User can change the PIR detection sensitivity in device settings. we recommend to set sensitivity at "Disabled" or "Low" to reduce false alerts and save the battery power in noisy environments.
- * Disabled: disabled PIR detection.
- * Low: delay 7 seconds PIR detects a moving.
- * Medium: delay 5 seconds PIR detects a moving.
- * High: delay 1 second PIR detects a moving.

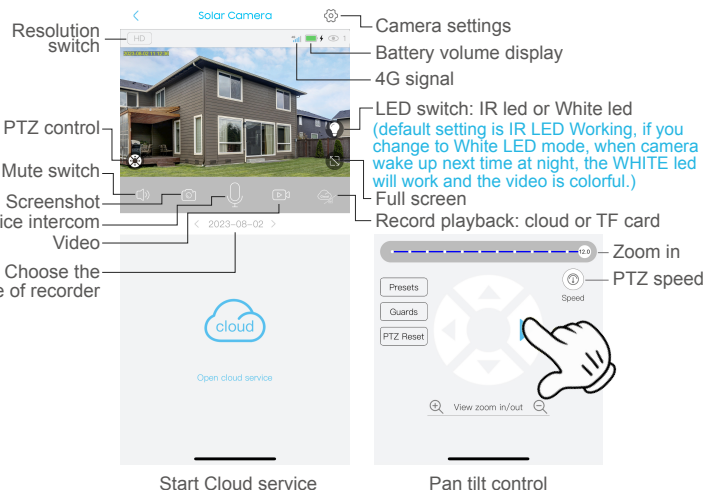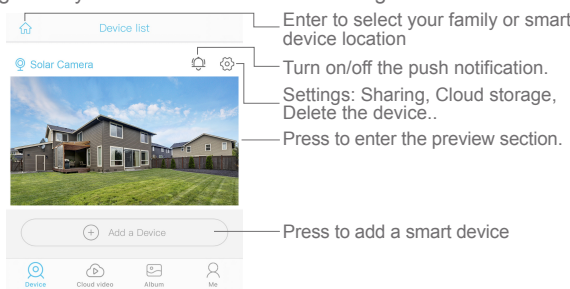


- 6 -

6. CONFIG NOTES

Question: Camera can't rotate in any direction or wake up by PIR, only view the video via mobile phone remotely, It seems battery is also full.

Reason: The battery power is below the working voltage **at some time**, So the protection circuit turns off the power.

Action: Enable the protection circuit of battery again: Use Type-C Cable to recharge the camera with DC 5V power supply about 2s-5s, camera will rotate again. (Only Type-C port can enable the protection circuit)



DC 5V



Tips:

About 7 hours for full charge batteries with DC 5V 2A power supply for the first time.



DC 5V~9V/12V/20V



! Forbiddance:

DON'T always charge batteries with Type-C port when camera working

6.1 Please charge the battery fully before using the device. The battery life will be affected by the device wake-up time and the number of wake-ups. Therefore, the PIR sensor alarm detection function is used in an environment with a lot of people. It is recommended to turn off or set the device to low sensitivity to reduce device wake-up and call times extend battery life. **When the battery is low, please charge the battery immediately.**

6.2 It is a delicate device with low power consumption design. Everytime the device is awakened and will work for a few seconds. After that, the device will enter standby mode to save power. You can set the work time in the app settings.

6.3 Insert 4G SIM card at first, then power on the camera. If red indicator of 4G camera is light always.

Action: don't worry, please check the "APN name, MNC, MCC" information on your mobilephone setting (access point), then contact seller. We will verify this 4G signal of local telecom operator match with the camera or not, then seller will provide solution for you.

- 7 -