



iCSee

Quick Guide

Fast connect camera to APP

Quick Configuration

Step 1: Download the APP

Tip 1: Scan the QR code.



Tip 2: Search for “iCSee” in the App Store or Google Play to download.

Step 2: Power On

After powering on the camera, it will announce “System starting up, please wait to be configured” after a few seconds. You can then pair the camera with the network. If the camera does not make any sound for a long time, long-press the reset button to restore factory settings.


Note:

For local storage, install the TF card first before powering on the device (TF cards do not support hot-swapping; always insert or remove the TF card when the camera is off). Cloud storage is recommended for safety and convenience. For details, refer to “Step 4”.

Step 3: Configure the network of the camera

1. Connect your phone to a Wi-Fi network and turn on Bluetooth.
2. Open the iCSee app, register an account, and log in (Figure 1).

Figure 1

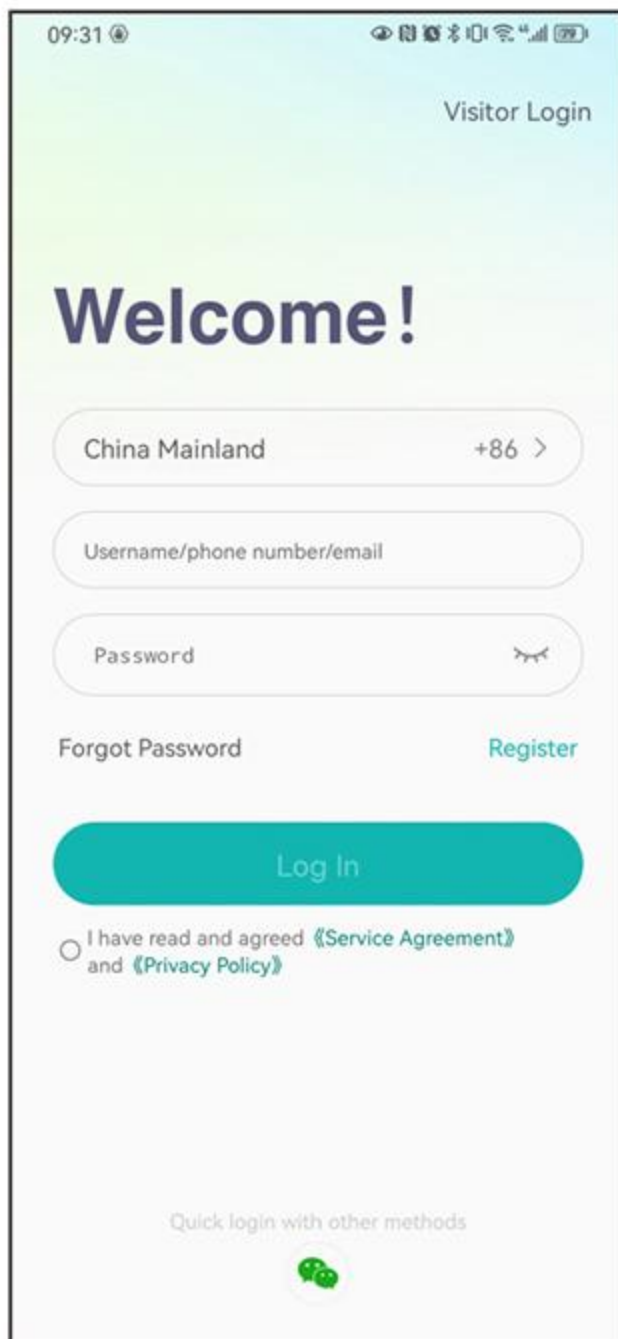

3. After successful login, click the "+" button (Figure 2).

4. Wait for the device to be added to be found, and click "OK" (Figure 3).

Figure 2


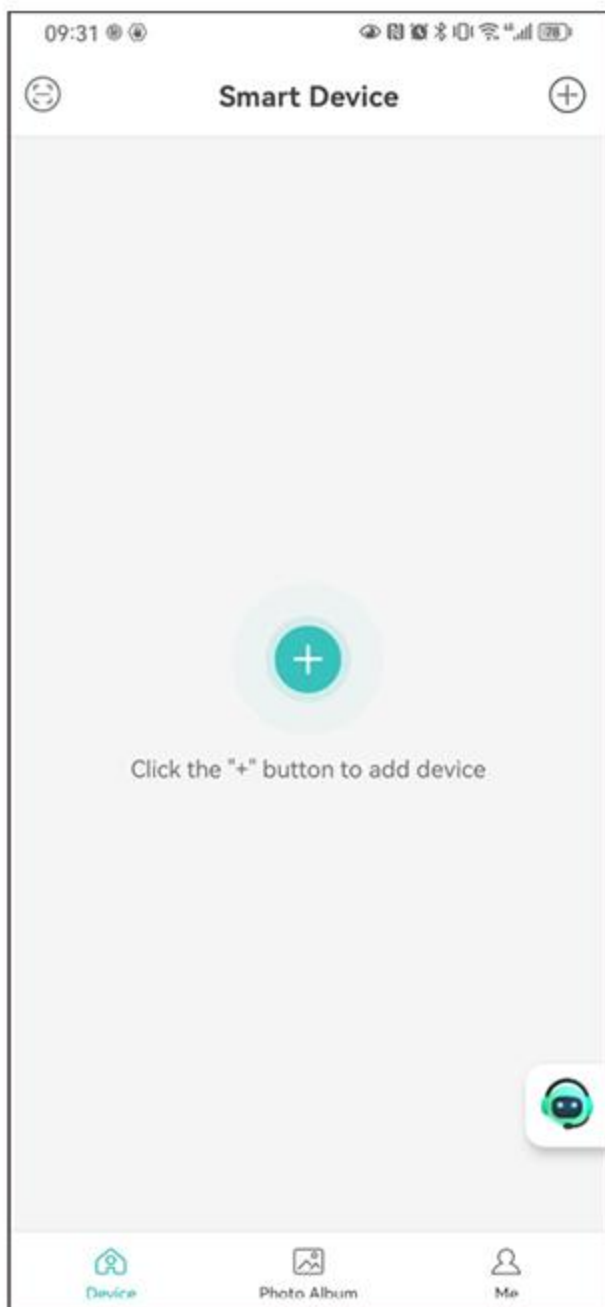


Figure 3

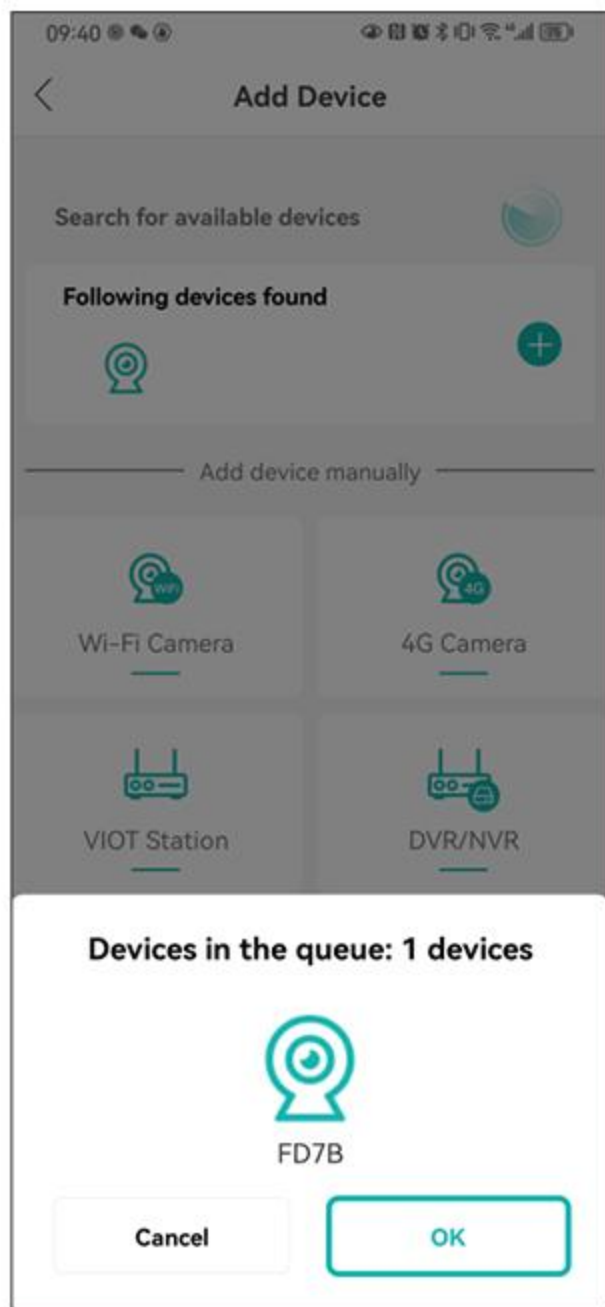

5. Enter the Wi-Fi password and click “OK” (Figure 4).
6. Wait for the camera network configuration. When the camera issues a “connect successfully” voice prompt, it indicates that the network configuration is successful (Figure 5).

Figure 4


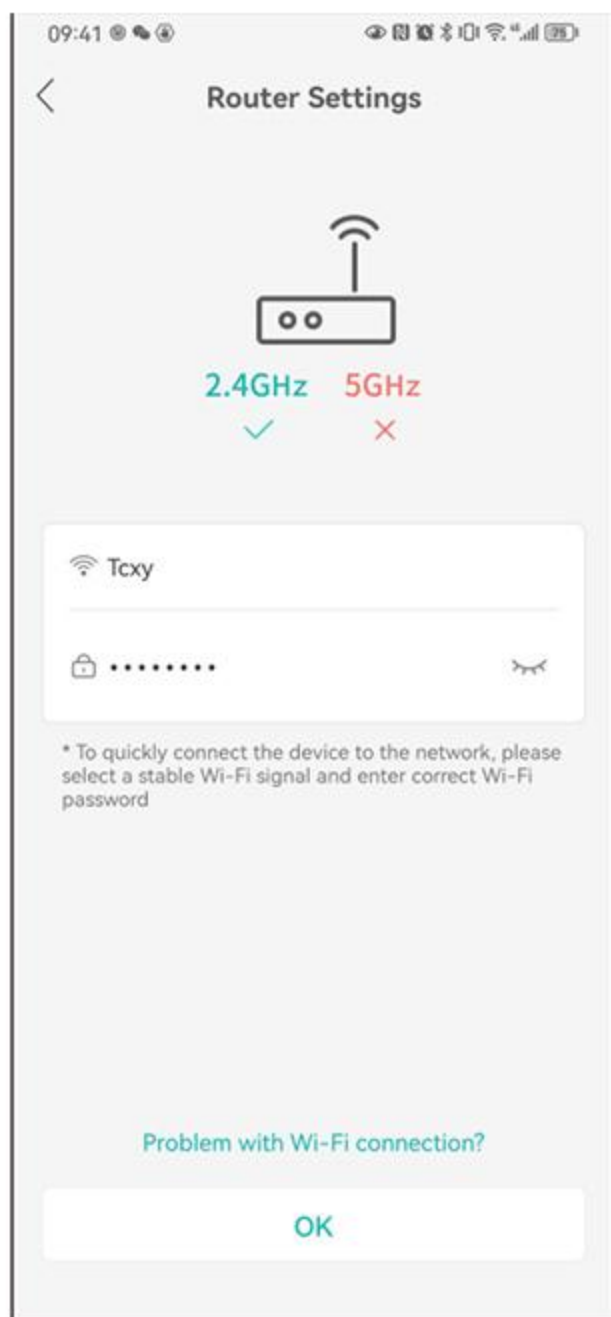


Figure 5

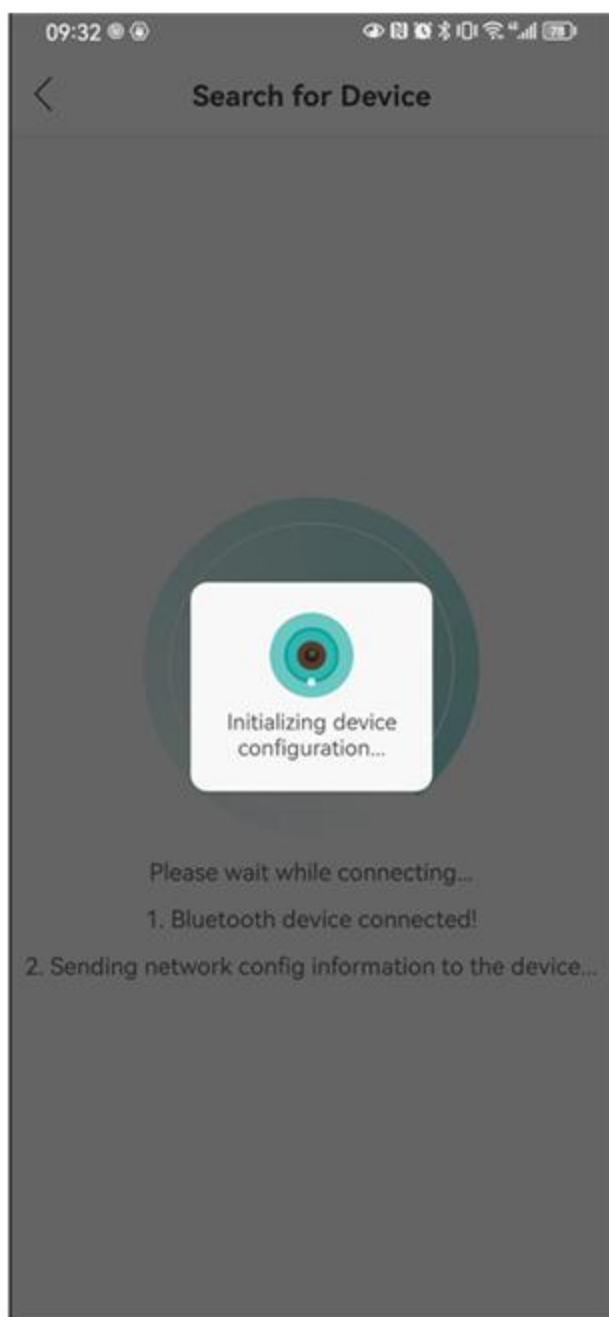

Common Questions

Q: How to save camera recordings?

A:

1. Local TF card storage – Supports up to 128GB. When the TF card is full, older videos are automatically deleted for loop recording.
2. Cloud storage recommended – Alarm videos are stored on the cloud server with real-time alerts. Safe and reliable. Learn more on the app's cloud service page.

Q: What to do if the camera is not connected or offline?

A:

1. Check if the camera's power supply or router network is functioning normally.
2. Unplug and reconnect the camera's power to restart it.
3. Restore the camera to factory settings.

Q: Does it support 5G band routers?

A:

If your router's 5G and 2.4G bands share the same SSID, connect directly. If the 5G and 2.4G bands have different SSIDs (e.g., 5G: XXXXX-5G, 2.4G: XXXXX-2.4G): Connect your phone to the 2.4G SSID (XXXXX-2.4G). Pair the camera to the network.

Notice

- 1.Immediately modify the device password after powering on the product.
- 2.Do not install the device in damp, dusty areas or locations accessible to children.
- 3.Use and store within the permitted temperature/humidity range. Do not disassemble the equipment without authorization.

Special Notes

- 1.Specifications are subject to the actual product. The quick start guide is for reference only.
- 2.The app and device firmware will be updated periodically. Update online as needed.
- 3.For any discrepancies in function descriptions or typographical errors, refer to the official company documentation.